

Door

REVOLVING DOOR-H



Together with the casing, this metal revolving door represents one of the basic elements to construct clean workplaces and areas with maximum safety, sterility, hygiene, easy maintenance and sanitation.

PRODUCT DESCRIPTION

Facing


- The facing of the door leaf consists of a molded tile produced by precision molding.
- Reinforcements are glued-in along the perimeter of the facing, in order to increase the rigidity of the door leaf.
- Reinforcement and filler are glued together under pressure.

Door wing

- The door leaf is solid or glazed with the PHARMA system, offering double-sided glazing where the glass pane is in plane with the surface of the door leaf.
- It is possible to install blinds in the space between the glass panels.

Casing

- Mounting into the partition.
- Casing is in line with partition.

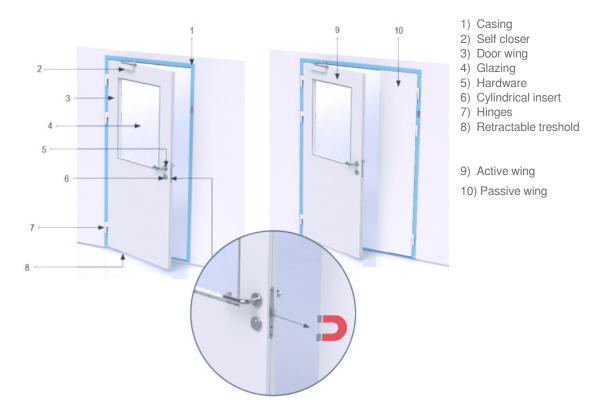

ADVANTAGES

• Magnetic locks - tongue extends until closing and no damage to casing the paint.

TECHNICAL DATA

Door type		
basic hinged door H		

Swing direction
left
right

Finish	
single wing	
double wing	

Door dimensions
1100x2010
1300x2010mm (active wing width 900mm)
1500x2010mm (active wing width 900mm)
1700x2010mm (active wing width 900mm)
700x2010
900x2010
In the case of an atypical active door wing, it is necessary to specify the dimensions of the active wing as part of the code. For example 1800/900/x2010 (clear width 1800, active wing 900, passive wing 900).

Door thickness	
thickness	value
42 mm	for partition 52 mm

Grounding for zone I and II

Earthing for zone I and II

Earthing has not been done

Atypical

Hinge type		
value	detailed description	colour
Dr. Hahn	Hliníkový pant s teflonovou vložkou	RAL (standartně RAL 9016 mat)
Atypical		

In the case of a different hue of the casing, the hinge is automatically of the same hue as the casing. Atypical finish - the customer requires a different hue than the casing - according to RAL colour standard.

Glazing size

usual glazing 400x920

solid door without glazing

atypical

The atypical dimension of the glazing should be noted in the note.

In the case of double doors, only the active wing will be glazed.

Glazing glass type		
value	detailed description	
laminated safety glass, thickness 6 mm		
mirror glazing 2/3 on side of hinge 400x1450mm	reflexní	
mirror glazing on opposite side of hinge 400x1450mm	reflexní	
atypical		
Mirror size 400x1450 mm for all door dimensions.		

Blinds type		
value	detailed description	colour
without blinds		
magnetic blinds	Provedení S 156.	dle vzorníku RAL
mechanical blinds	Provedení S 156.	dle vzorníku RAL
atypical		
Standard hue of blinds S156 (silver) according	g to the manufacturer's sample book, custom hues	according to RAL colour standard.

Blinds location

on side of hinges

on opposite side of hinges

HVAC grille	
value	colour
without HVAC grille	
grille 400x400 (VPR+VPK)	dle dveřního křídla
atypical	
Standard colour finish is the colour of the door wing.	

Type of door control		
value	detailed description	colour
automatic operator	Trido SW80	Přírodní elox
manual		
door closer	DORMA TS 83	dle dveřního křídla
atypical		
Warning - in the case of double wing door with self-closers on both wings, the door closing coordinator shall be specified.		

I. Hardware - on the side of hinges		
value	detailed description	colour
handle	LINA-R	nerez
fixed doorknob	LINA-R	nerez
elbow switch (S10-E)	Montáž do výšky vypínačů	černá
one-point panic exit push device	FAB. Tlačné panikové kování jednobodové 890100	RAL
sensor switch (clean switch)	Bezdotykový snímač	bílá
button (S10-E)	ABB tango	bílá
operable doorknob	LINA-R	nerez
stainless steel plug	LINA-R	nerez
not included in delivery		
atypical		

II. Hardware - on the opposite side of hinges
handle
fixed doorknob
elbow switch (S10-E)
one-point panic exit push device
sensor switch (clean switch)
button (S10-E)
operable doorknob
stainless steel plug
not included in delivery
atypical

Cylindrical insert			
value	detailed description	colour	
openings for lock and insert have not been cut out			
standard cylindrical insert	vložka 35/35	niklovaný	
not included in delivery			
atypical			
For S10-E it is always C0 - the opening is not cut out.			

Drop seal		
value	detailed description	colour
Dropseal ELLEN MATIC 2K	Gumové těsnění (max. výsuv 10-12mm)	Přírodní elox
without strip		
atypical		
Protective bumper, kick plate - dimensions and finish must be specified in the notes to the door order.		

Casing mounting		
value	detailed description	
finish for a plasterboard wall (HSE)	tloušťka příčky (mm) - 75; 100; 125; 250	
finish for a double partition		
finish for partition panels	tloušťka příčky (mm) - 52	
finish for Surgical		
atypical		
When ordering door frames type "H" in the company HSE, it is necessary to state in the order: Door frames H DZD for FOR CLEAN		

Casing thickness

52 mm

100 mm

145 mm

in the case using of the additional 25 mm column MS-156, it is necessary using of notes:

- 1 additional column on the hinge side
- 2 additional column on the opposite side of the hinges

Indication

Without indication

with indication on the right on side without hinges SP-OZ

with indication on the right on side of hinges SP-PZ

with indication on the left on side without hinges SL-OZ

with indication on the left on side of hinges SL-PZ

with double-sided indication on the left SP-O/P

with double-sided indication on the right SP-O/P

atypical

Door wing blocker		
value	detailed description	
without el. blocker		
electromechanical solenoid lock ST-DB 100	zámek ST-DB 100. Pod napětím 24V uzavřen.	
atypical		

Facing hue and material

Galvanized metal sheet, hue RAL 9016

Stainless steel AISI 304

Powder coating (Komaxit), hue RAL

RAL anti-bacterial varnish

atypical design

In the case of different door wing facings, it is necessary to specify the hue as atypical, and to provide more details in the notes.

Casing hue and material

Galvanized metal sheet, powder coating (Komaxit), hue RAL 9016

Stainless steel AISI 304

Galvanized metal sheet, powder coating (Komaxit), hue RAL

RAL anti-bacterial varnish

Atypical design

Type design

Atypical design

Type design

0 - Unique specification out of offered versions

Atypical design

Q - atypical design that cannot be uniquely specified by a code

MORE INFORMATION, PHOTOS

