


Lights

FOR CLEAN LED LAMPS TO BE FITTED IN LIGHTWEIGHT METAL SUSPENDED CEILING LP2

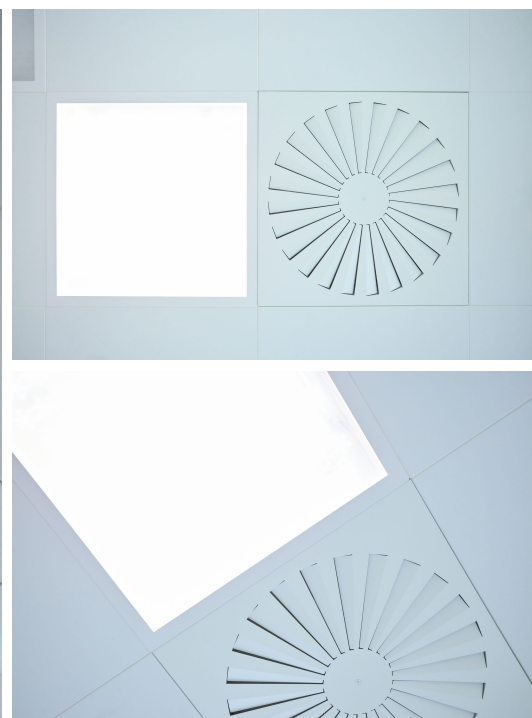

LED fixtures are used for the lighting of interiors with basic environment. They are mostly flush-mounted in the lightweight metal suspended ceiling /LP/ For Clean, a.s. The light fixture features IP 44 ingress protection from the top and IP 54 ingress protection from the bottom according to EN 60529 (IEC 529).

TECHNICAL DATA

Section in project documentation

Snap-on FOR CLEAN LED fixtures to be fitted in lightweight metal suspended ceiling LP2

Grid dimensions x light fixture height

width	depth	light fixture height
312 mm	625 mm	33 mm
625 mm	625 mm	33 mm
312 mm	1250 mm	33 mm

Power source for light

Power source for 1 light

Power source for 2 lights

Every 5 lights are powered from the source

Dimmable light fixture

standard light fixture (non-dimmable)

dimnable light fixture

Backup power source / light fixture

standard light fixture - without backup power source

standard light fixture + emergency lighting kit HELP2

Bottom frame material and colour (RAL)

steel sheet class 11, hue RAL 9002

steel sheet class 11, hue RAL 9016

stainless steel AISI 304

Powder coating (Komaxit), hue RAL

MORE INFORMATION, PHOTOS

